





B!

FLEX HB

877FAB · 877FABY

Hydrophobic IOL

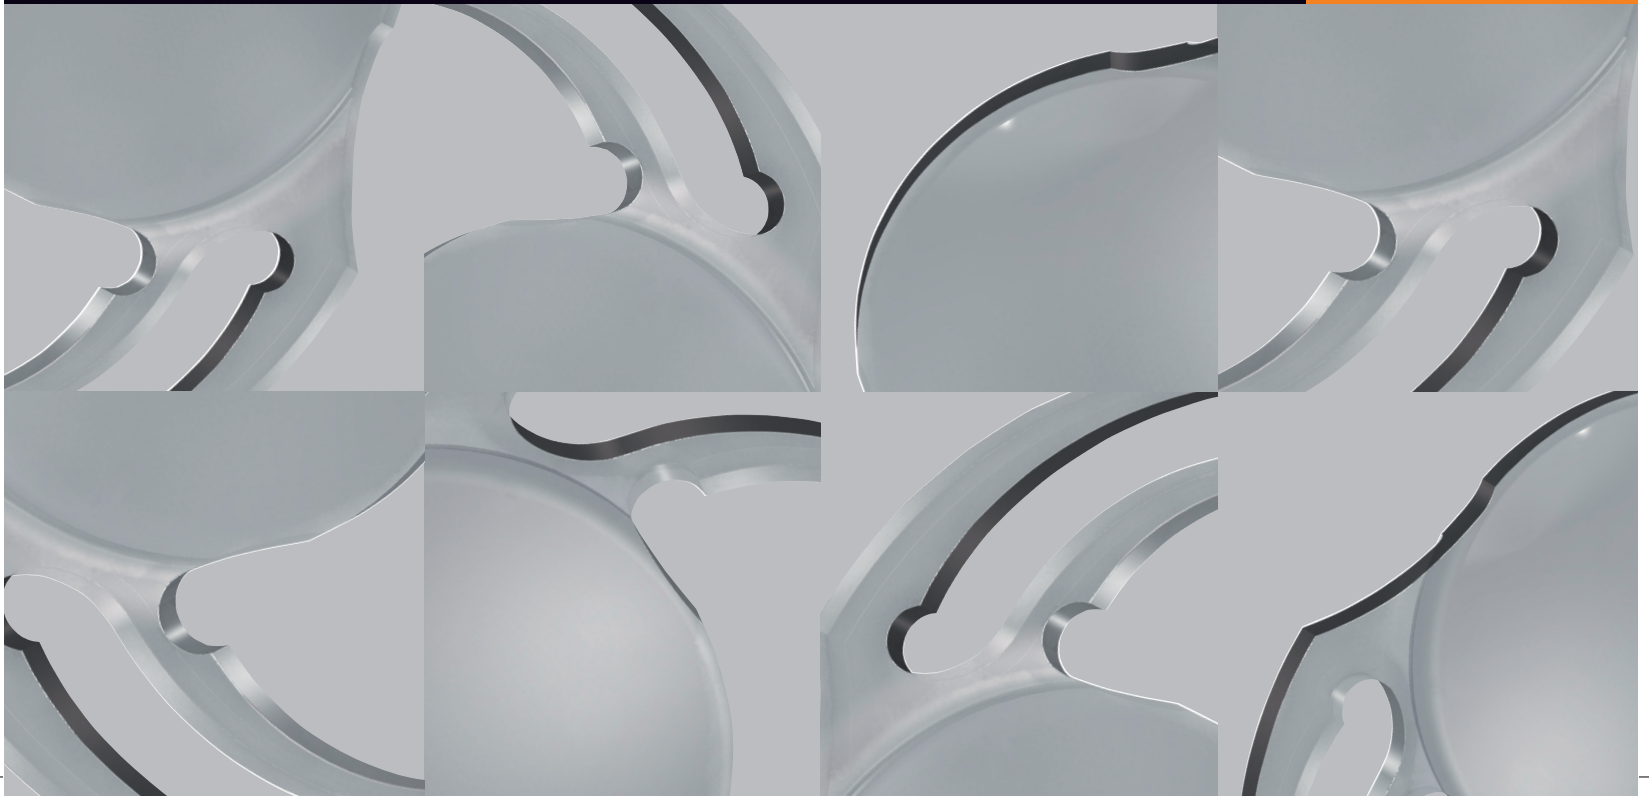

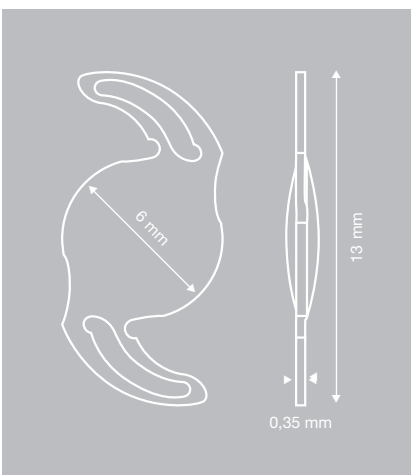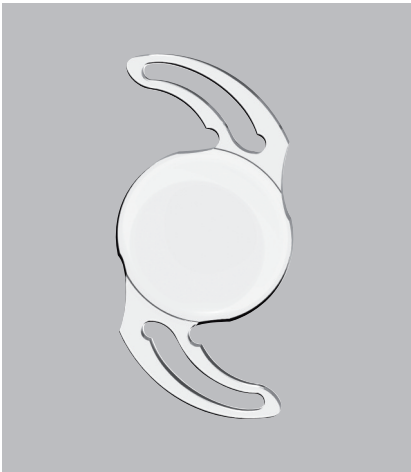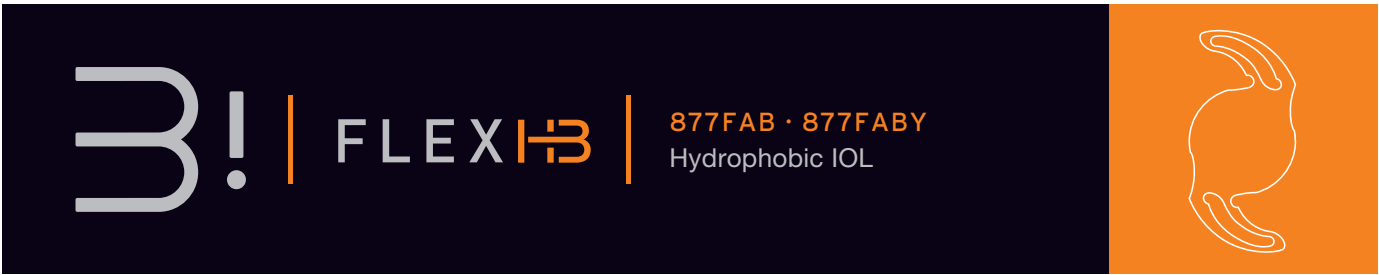

**Technical specification**

Type	Single-piece Aspheric Hydrophobic Intraocular Lens
	for implantation into the capsular bag
Optic	Refractive – Aspheric
PCO protection	360° Special Square Edge (patented)
Estimated incision size	2.4 mm
Powers available*	0.0 D → +9.0 D · (increment: 1.0 D)
	+10.0 D → +30.0 D · (increment: 0.5 D)
	+31.0 D → +35.0 D · (increment: 1.0 D)

A-constant**	118.9 (SRK/T)
Sterilization	Ethylene-oxide

**Material**

• 877FAB	Hydrophobic Acrylic with UV absorber
• 877FABY	+ blue light filter
Refractive index	1.47
ABBE number	58

**Geometry**

Optic design	Biconvex
Overall length	13.0 mm
Optic diameter	6.0 mm
Haptic thickness	0.35 mm
Haptic angulation	0° – asymmetrical design with posterior vaulting

**Storage**

Temperature	+15 – +35°C
Humidity	15% – 50%
Shelf life	5 years (from sterilization)

\* Other powers upon request  
 \*\* It is recommended that surgeons personalize the constants they use. Please find more information about IOL constants on ULIB. (<http://www.ocusoft.de/ulib/c1.htm>)

EA-IMCBHEN 03 201605



**Medicontur**  
 Medical Engineering Ltd  
 export@medicontur.com  
 www.medicontur.com

**Head Office**  
 Herceghalmi Road  
 2072 Zsámbék  
 Hungary

**International Office**  
 Chemin des Aulx 18  
 1228 Plan-les-Ouates  
 Geneva / Switzerland

