








3! | POB-MA

FLEX | HYDROPHOBIC PRELOADED

3! | FLEX HB



EASY, SAFE AND
PREDICTABLE
INJECTION SYSTEM

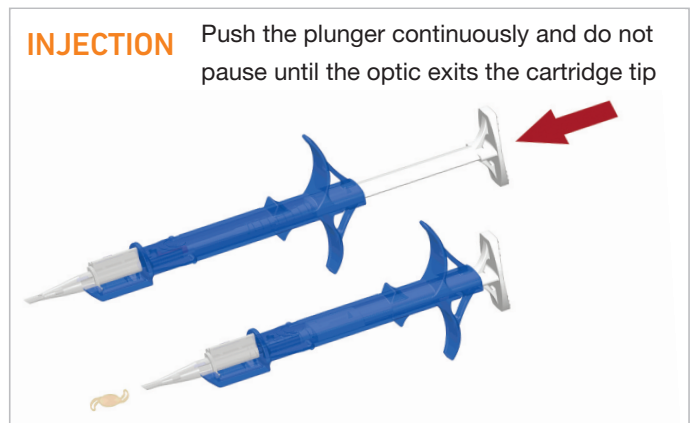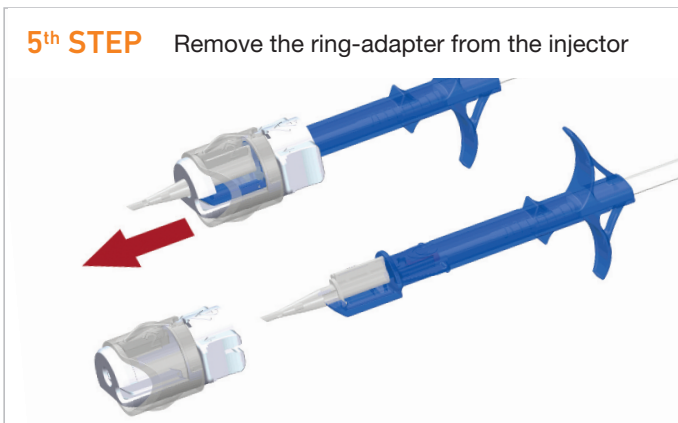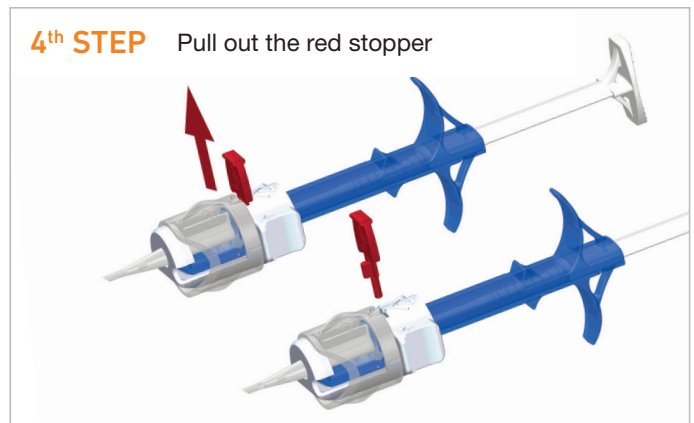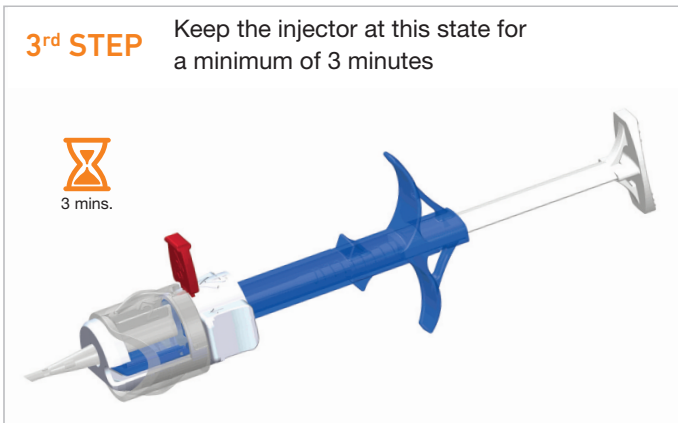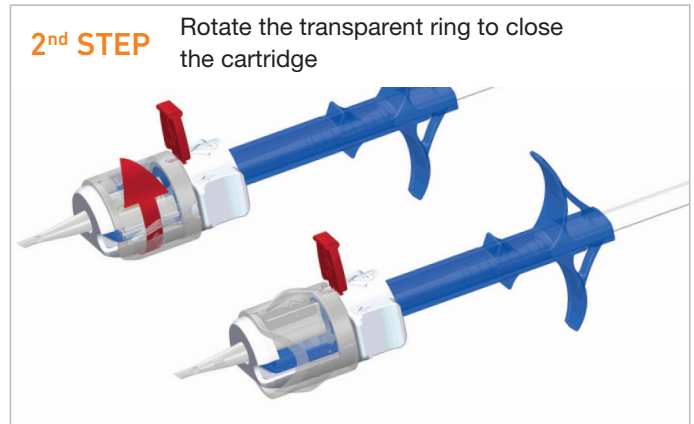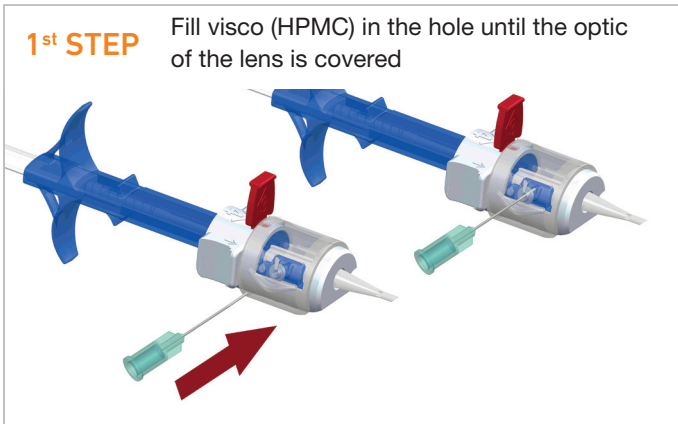

For detailed information please consult Instructions for Use (IFU) of the product.

Lens types	Single-piece Aspheric Hydrophobic Acrylic IOL
Material	Hydrophobic Acrylic with UV absorber + optional blue light filter
PCO protection	360° Special Square Edge
A-Constant**	118.9 (SRK/T)

Diameters	6.0 mm (optic) / 13.0 mm (overall)
Haptic angulation	0° – asymmetrical design with posterior vaulting
Powers available***	-10.0D → +9.0D · (increment: 1.0 D) +10.0D → +30.0D · (increment: 0.5 D) +31.0D → +35.0D · (increment: 1.0 D)

* patent protection

** it is recommended that surgeons personalize the constants they use*

*** other powers upon request

